

# TLD-WD Wireless Dimmer

Our Wireless LED Dimming Controller delivers ultra-smooth dimming performance through all light levels. Controlling (on-off and dimming) can be made via a dual zone remote or a wireless wall switch. Multiple modules can be linked to one control or multiple controls can be linked to one module. No batteries are required.



Please contact The Lighting Division if you have any questions regarding its use or installation.

Frequency	902mhz
Size	2.9" x 1.3" x .7"
Power	12v - 24v DC / 5A max
Max Load	75w/15v, 120w/24v
Operating Range	70 Feet
Warranty	2 years

## Programming the TLD-WD to a TLD-WDC (wireless wall switch) or a TLD-WHC (wireless remote)

- For the linking process to be successful you must be within 3-5 feet of the control module with the controller.
- Upon powering up, the green light on the controller will blink rapidly. Press and hold the LNK button on the module until the lights begin to blink.
- As the lights are blinking press the up button on either type of control device 3 times quickly. The lights will pause then continue to blink for about 30 more seconds. Link is complete when lights stay on.

### Controllers available:



**TLD-WHC**  
Dual zone  
Remote Control




**TLD-WDC**  
Single zone  
Wall Control



**TLD-WDC2**  
Dual zone  
Wall Control

HOLD "LNK" BUTTON

CLICK TOP BUTTON 3 TIMES

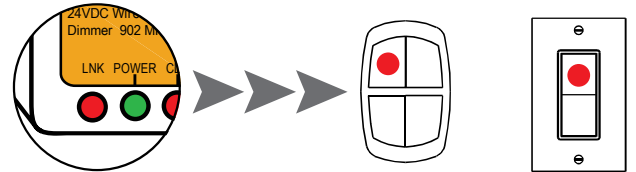

### Purging the TLD-WD from all links

- Press and hold the LNK button on the module until the lights begin to blink.
- As the lights are blinking press the CLR button until the lights pause, then release the button. The lights will continue to blink for about 30 seconds. Purge is complete when the lights stay on.

