

CRYSTAL RECESS PUCK

VALUE LED LINE

Application

The Crystal Recess Puck Light is designed for through hole mounting and provides interior or under cabinet lighting as well as limitless other uses where bright, dimmable light is desired.

Configuration

The Crystal Recess Puck comes in four color options: chrome, white, black or brushed nickel. Installation is as simple as drilling a hole and inserting the recess puck. It's held in place by two integrated springs. Pucks can be wired in either "daisy-chain" or "home-run" configuration. With such low wattage requirements, you can wire up to 20 pucks in one continuous run.

Electrical/Connectors

Crystal Recess Puck fixtures are 15v DC regulated, and come with two sets of 20/2 clear wires pre-installed for daisy chain wiring convenience. The fixtures consume 2 watts of power.

LEDs

Fixtures are designed with TLD's select light engine, engineered for efficient thermal management and maximum longevity. Exclusive use of quality LEDs ensures consistent chromaticity for brilliance and long life. The CRI rating is 85.

Light output

The fixtures are task level brightness and are available in your choice of 2700K lite amber, 3000K warm white or 4000K neutral white, to complement any design look.

Power Supplies, Dimmers and Accessories

The Crystal Recess Puck Light is fully compatible with TLD's entire line of low voltage 15vDC power supplies, dimmers and accessories.

Warranty


Fixtures are rated for 50,000 hours at 70% of lamp lumen output and backed by a 3-year Limited Warranty by TLD, an innovative leader in LED technology.

Brushed Nickel

White

Chrome

Black

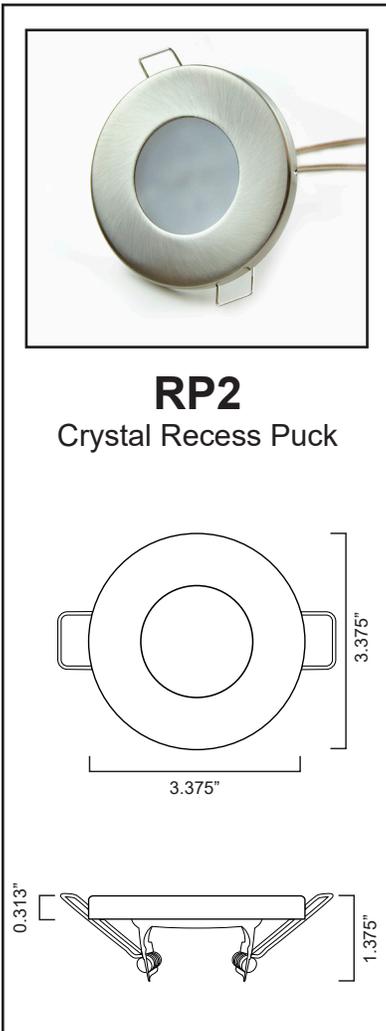

The Lighting Division



Life In LED Light

100 Boxart Street • Suite 230

Rochester, NY 14612

585-697-0093

Fax: 585-663-1432

thelightingdivision.com



Made In USA

of U.S. and
imported parts

TLD-121-5-21

Crystal Recess Puck Installation Instructions

When connecting any electrical component please take note of the wire polarity. Wiring incorrectly may cause component failure.

Power Supply - 15v DC regulated low voltage (Constant Voltage)
ALWAYS FOLLOW LOCAL ELECTRICAL CODES



Hard wire:

- Connect "AC IN" side of the power supply to an acceptable AC power source being sure to obey all local electrical codes.
- Connect the RED (positive) wire from the DC OUT side of the power supply to the copper wire marked in RED from one set of wires of the fixture.
- Connect the Black (negative) wire from the DC OUT side of the power supply to the silver colored wire from the same set of wires as the positive from the fixture.


Wall Plug - Plug a suitable wattage size wall adaptor into an AC powered outlet. Use supplied terminal adaptor with wires to connect to fixture being careful to maintain the proper wire polarity.

Wiring Configurations - Fixtures can be wired in either a daisy chain or home run configuration depending on your installation needs. There are two sets of wires coming from the fixture. Either set can be used as the power input. The other set is used for daisy chaining fixtures together for convenience. If daisy chain wiring is not being used then secure the other set so as to not cause any electrical shorts.


Fixture Mounting - Make a hole for the fixture using a 2 1/2 inch (64mm) hole saw. Feed the wire through the hole. Then fold up the spring loaded arms of the fixture and maneuver them through also so they come down and hold the fixture in place.

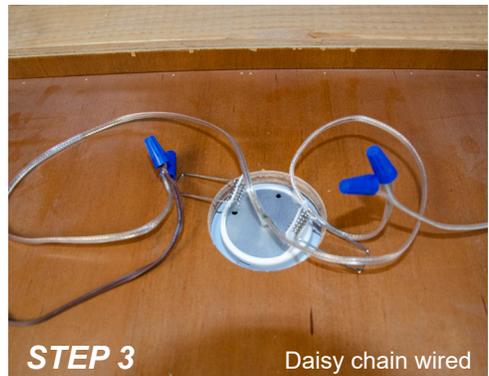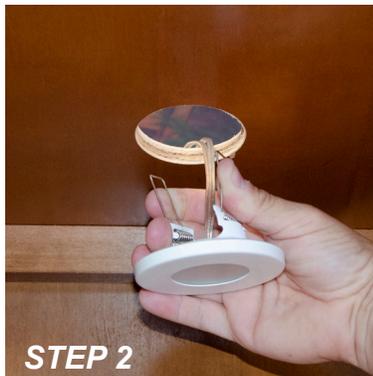

Daisy Chained

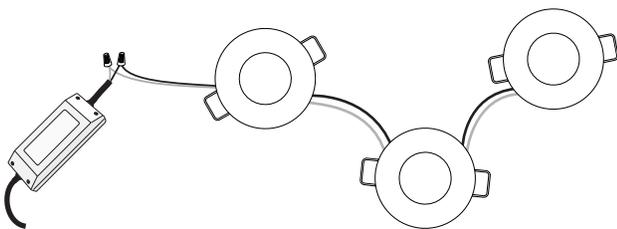

Home Run

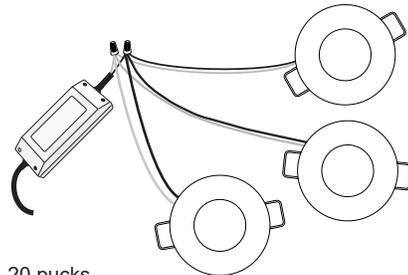

Maximum End to End run (daisy chained) **RP2** - 20 pucks

	Light Color	Finish
RP2	30 - 3000K Warm White	CH - Chrome
	40 - 4000K Neutral White	WH - White
		BK - Black
		NK - Brushed Nickel

Power consumption is 2 watts each.

Light Output	
Source Lumens per Ft - 2700K	125
Source Lumens per Ft - 3000K	150
Source Lumens per Ft - 4000K	175