


DDS
Square




KORONA REFLECTIONS


SPECIALTY LINE FOR POLISHED SURFACES

Application

The sleek designer appearance of TLD's Korona Reflections Line makes it a perfect choice for interior under-cabinet lighting above reflective countertops, where a high-end, dimmable bright light source is desired, while eliminating the reflective "dots" created by high gloss surfaces. The Reflections fixtures, is offered in four profiles, also provide display lighting with a distinguished, decorative look within glass curio cabinets or jewelry cases.

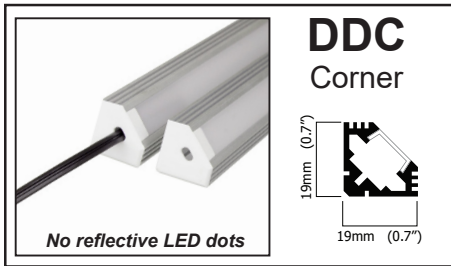


DDC
Corner




Configuration

The Reflections line is constructed of lightweight extruded anodized aluminum in four unique shapes, presenting an upscale look for all tastes and requirements. Fixtures contain a frosted cover over a linear LED channel. They are offered in a full range of lengths from 7"-70". Installation allows for a variety of mounting options, in "daisy-chain" continuous run or "home-run" multiple branch configuration, making custom layout design a breeze.

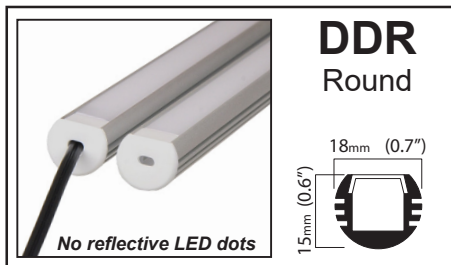

DDR
Round



Electrical/Connectors


Reflections fixtures are 15v DC regulated, designed with integral connectors for the cleanest, easiest installation on the market. The recommended wire to use is stranded 20 AWG.

LEDs


Fixtures are designed with TLD's select light engine, engineered for efficient thermal management and maximum longevity. Exclusive use of premium LEDs ensures consistent chromaticity for the highest quality and longest life.

Light output

The Korona Reflections Line is available in your choice of 2700K lite amber, 3000K warm white or 3500K neutral white.

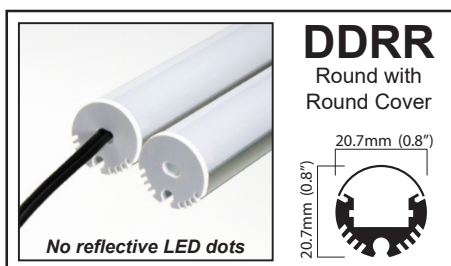

DDDR
Round with
Round Cover



Power Supplies, Dimmers and Accessories

Reflections fixtures are fully compatible with TLD's entire line regulated of low voltage 15v DC power supplies, dimmers and accessories.

Warranty

Fixtures are rated for 50,000 hours at 70% of lamp lumen output and backed with a 6-year limited warranty by TLD, an innovative leader in LED technology.

LIGHT OUTPUT


	KRBT
Power Consumption	3W/Ft
Source Lumens per Ft - 2700K	195
Source Lumens per Ft - 3000K	205
Source Lumens per Ft - 3500K	225

POWER SUPPLIES AND DIMMERS


Fully compatible with TLD power supplies and dimmers. Download our power supply spec sheet from thelightingdivision.com

WIRING OPTIONS

DAISY CHAIN CONFIGURATION

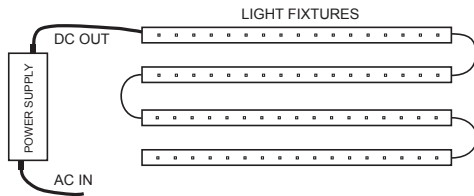

HOME RUN CONFIGURATION

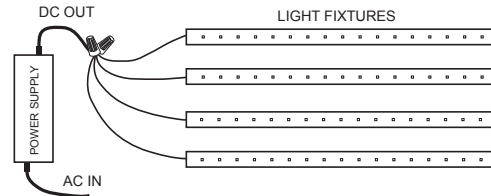

Maximum fixture run length (with a capable power supply) **KRBT - 16ft**

KRBT-KORONA TASK

Model No.	Fixture Wattage	Fixture Length (Inches)
070	2	7
120	3	12
170	4.5	17 1/4
220	6	22 1/2
280	7	27 3/4
330	8	33
380	9.5	38 3/4
430	11	43 1/2
490	12	48 3/4
540	13.5	54
590	15	59 1/4
640	16	64 1/2
700	17	70

MOUNTING OPTIONS

Capture Clip CCLP

1/4" H x 5/8" W x 13/16" D

CAPTURE CLIPS PROVIDED



Enclosure Style

DDR
DDS
DDC
DDRR

Spring Clip SCLP


1" H x 13/16" W x 1/2" D

SPRING CLIPS PROVIDED



Enclosure Style

DDR
DDRR



DDS comes standard with the option of screw or capture clip mounting.

Light Engine	Model No.	Light Color	Enclosure Style	Mounting Type
KRBT	070	27	DDR	CCLP
	120	2700K	Round	Capture Clip
	170	Lite Amber	DDS	(DDR, DDS, DDC, DDRR)
	220		Square	
	280	30	DDC	
	330	3000K	Corner	
	380	Warm White	DDRR	
	430		Round with Round Cover	
	490	35		SCLP
	540	3500K		Spring Clip
	590	Neutral White		(DDR or DDRR Only)
	640			
	700			